



# Prominence Edge Circle Series

FULL COVERAGE OFFSET 2" FROM EDGE LED Illuminated Mirror

## REFLECTIVE LIGHTING

### DESCRIPTION

The Prominence Edge Circle Series offers you a full edge to edge light coverage with a 2" offset around the perimeter of the mirror. Available in a fully customizable circular or oval silhouette. The optional one-touch dimming system allows you to choose the perfect light intensity and color temperature—from a cool 5,000K task lighting to a warm, sunlit 2,700K glow. Elevate your experience even further with upgrades like an integrated night light, a built-in Bluetooth speaker, and other user-friendly features that transform your mirror into a personalized statement of style and function.

### APPLICATION

Our commercial grade mirrors are perfect for hotels, spas, salons, and make-up studios as well as make a beautiful upgrade for any bathroom remodel.

### STANDARD FEATURES

- 5mm lead-free, copper-free, corrosion-resistant glass
- Forward-facing, UV Free task lighting
- IP44 Rating, suitable for damp locations
- Fingerprint free frosted design aesthetic for added elegance
- Most common size for round is 30", and for oval is 32" x 24", however custom sizes are available
- Oval mirrors can be mounted both vertically or horizontally; specified as an option
- Environmentally sustainable and energy efficient LED technology
- Fast lead times and easy installation
- 5-year limited warranty

### LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Dimmable with 0-10V, TRIAC, reverse/forward phase standard
- CRI: 90+
- Multi-CCT available: 2700K-5000K
- 80-90 LPW initial lumens
- 120-277 VAC voltage sensing input
- Calculated L70-hour 50,000 hour LED lifespan

### SAFETY SPECIFICATIONS

- Entire assembly meets UL standards
- IP44 rating for damp locations
- IP65 rating optional
- Safety filmed mirror to protect against glass shatter



Catalog Number:	Type:
Project/Job Name:	
Prepared By:	Date:



## Fully Customizable

### AVAILABLE OPTIONS

- Integrated one-touch dimming control for ambient lighting
- Motion and Touch sensor on/off switch capabilities for ease of use
- Anti-Fog, Anti-Microbial, and/or Anti-Graffiti technology enhancements
- Lighted circular magnification/makeup mirror function
- Integrated Night Light, and/or Bluetooth Speaker
- Horizontal or vertical mounting bracket



Positioned Inside 2 inches From Edge



Magnification Function Added



Anti Microbial



Touch Sensor Switch



Motion Sensor Switch



Anti-Fog System



Night Light



Anti Graffiti



Integrated Dimming



Adjustable CCT



Bluetooth Speaker



Circular Magnification



IP65 Rated

Specifications are subject to change without notice. Installation must be performed in accordance with Reflective Lighting installation instructions.

118 E 3RD ST SUITE K | PERRYSBURG, OH 43551 | 419-908-2759 | WEBSITE: [REFLECTIVE.LIGHTING](http://REFLECTIVE.LIGHTING)



# Prominence Edge Circle Series








FULL COVERAGE OFFSET 2" FROM EDGE LED Illuminated Mirror

REFLECTIVE LIGHTING

## INSTALLATION SPECIFICATIONS

- 24" bare wire whip provided
- Chassis should be mounted to wall studs; mounting holes are provided

Sample Line Drawings

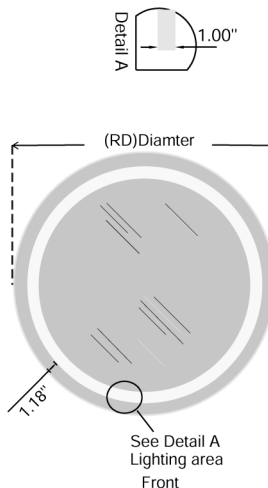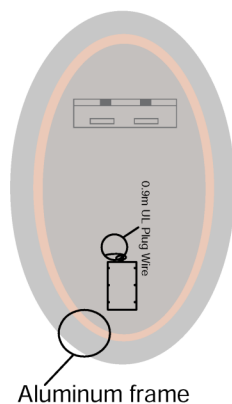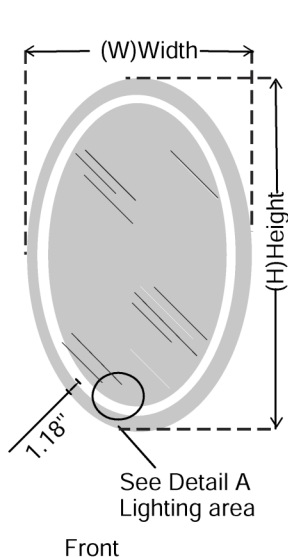

## Pick Your Options

### ORDERING INFORMATION

EXAMPLE: RLPEC-RT-H-48-32-AC-TC-T-NL-AF-BT

Lighted Mirror	Shape	Orientation	Height	Width	Color Temp	Controls	Control Location	Options (List ALL that apply)
RLPEC	R-Round	H-Horizontal (Narrow Dimension is Top to Bottom)	XX Write in Height	XX Write in Width	27-2700K	TC-Touch Controls (With last state memory)	T- Top Center <sup>3</sup>	AF-Anti Fog (heated) AM-Anti Microbial AG-Anti Graffiti
	O-Oval	V-Vertical (Narrow Dimension is Left to Right)			30-3000K	MC-Motion Controls	B- Bottom Center <sup>3</sup>	MB3-Magnification Built In 3x <sup>4</sup> MB5-Magnification Built In 5x <sup>4</sup>
					35-3500K	NC-No Controls <sup>2</sup>	L- Left Center <sup>3</sup>	NL-Night Light
					40-4000K		R- Right Center <sup>3</sup>	BT-Bluetooth Speaker
					50-5000K			I65-IP65 Rating
					AC-Adjustable <sup>1</sup> Pick 3 CCT options			
					<sup>1</sup> Touch Controls (TC) Required	<sup>2</sup> 24" Bare wire included; using other wall controller	<sup>3</sup> Availability based on illumination style selected	<sup>4</sup> Illuminated 3500K frosted edge ring

Specifications are subject to change without notice. Installation must be performed in accordance with Reflective Lighting installation instructions.

118 E 3RD ST SUITE K | PERRYSBURG, OH 43551 | 419-908-2759 | WEBSITE: [REFLECTIVE.LIGHTING](http://REFLECTIVE.LIGHTING)