





Wall Glow Series

INDIRECT BACKLIT EDGE TO EDGE LED Illuminated Mirror


REFLECTIVE LIGHTING

INSTALLATION SPECIFICATIONS


- 24" bare wire whip provided
- Chassis should be mounted to wall studs; mounting holes are provided

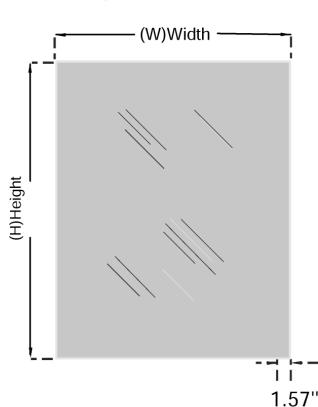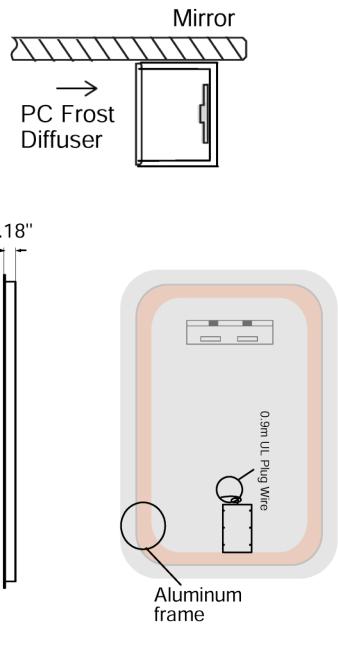


Front

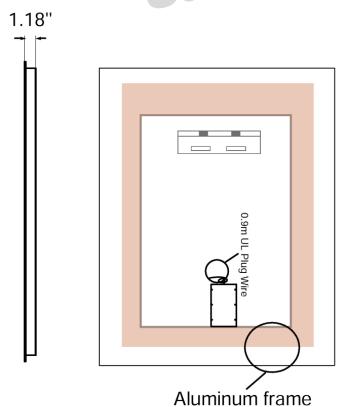

Back

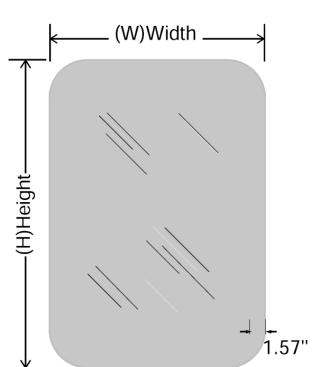

Front

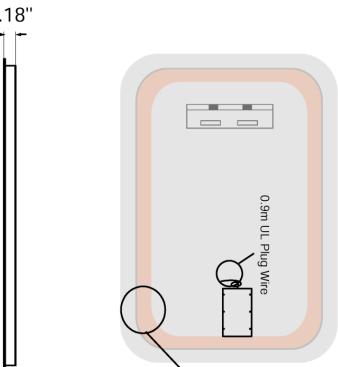

Back

Pick Your Options

EXAMPLE: RLWG-RT-H-48-32-AC-TC-T-NL-AL-BT

ORDERING INFORMATION

Lighted Mirror	Shape	Orientation	Height	Width	Color Temp	Controls	Control Location	Options (List ALL that apply)
RLWG	RT-Rectangle	H-Horizontal (Narrow Dimension is Top to Bottom)	XX Write in Height	XX Write in Width	27-2700K	TC-Touch Controls (With last state memory)	T- Top Center ³	AF-Anti Fog (heated) AM-Anti Microbial AG-Anti Graffiti
SQ-Square	V-Vertical (Narrow Dimension is Left to Right)				30-3000K	MC-Motion Controls	B- Bottom Center ³	MB3-Magnification Built In 3x ⁴ MB5-Magnification Built In 5x ⁴
					35-3500K	NC-No Controls ²	L- Left Center ³	NL - Night Light
					40-4000K		R- Left Center ³	BT-Bluetooth Speaker
					50-5000K			I65-IP65 Rating
					AC-Adjustable ¹ Pick 3 CCT options			RC-Rounded Edge Corners
					1 Touch Controls (TC) Required	2 24" Bare wire included; using other wall controller	3 Availability based on illumination style selected	4 Illuminated 3500K frosted edge ring

Specifications are subject to change without notice. Installation must be performed in accordance with Reflective Lighting installation instructions.

118 E 3RD ST SUITE K | PERRYSBURG, OH 43551 | 419-908-2759 | WEBSITE: REFLECTIVE.LIGHTING